WEB: www.emwicon.com
E-Mail: sales@emwicon.com
TEL: +886-2-8227-1348 FAX: +886-2-8227-1347
7F.-5, NO.258, LIANCHENG RD., ZHONGHE DIST., NEW TAIPEI CITY, TAIWAN

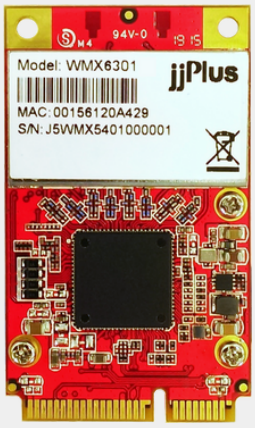

WMX6301

Wave-2 802.11ac Dual-Band Solution
with MU-MIMO and 80+80MHz

Features

- Qcalcomm QCA9984
- Multi-user MIMO (MU-MIMO)
- Mini PCIe 2.0 interface
- Designed for high bandwidth Enterprise Wireless Access Point

Specifications

Chipset Solution	Qualcomm QCA9984
Standards	IEEE 802.11ac/a/b/g/n
Protocol	WLAN: PCIe
Operating Voltage	DC 3.3V
Temperature Range	• Operating：-20°C~85°C • Storage ：-40°C~135°C
Humidity (Non-Condensing)	• Operating：5%~95% • Storage ：5%~90%
Interface & Dimension	• Mini PCIe • 50.8mm(±0.15mm) x 30.0mm(±0.15mm) x 11.0mm(±0.2mm)
Antenna	3x IPEX MHF1 connectors
Driver Support	Linux (Open Source) ATH10K
Certification	FCC/CE/IC

Copyright © EmWicon Corporation. All rights reserved.